



SOHO



UPS VFD

iDialog

1:1 400-1600 VA



USB
plug



Plug & Play
installation

HIGHLIGHTS

- **Compact**
- **Silent operation**
- **Contemporary design**
- **Auto restart**
- **Low power consumption**

The iDialog range is the ideal solution for protecting PCs and peripherals in the home and office.

iDialog is easy to install and economic to run for protecting:

- IT equipment such as PCs, Media Centres and peripherals, TVs, Home Cinema systems, Satellite and Digital Terrestrial Receivers and DVD recorders and players;
- xDSL modems and routers;
- Small home appliances.

Silent operation

The UPS is silent in operation (0dBA) thanks to its use of a fan-less design and high frequency components.

Advanced communications

PowerShield³ software allows for the safe shutdown of connected IT systems on mains power supply failure. PowerShield³ provides efficient and intuitive UPS management using bar chart displays for important operating information.

Auto restart

The UPS automatically restarts when the mains power supply is restored, after auto power.

ECO Line environmental protection

With energy savings in mind, the iDialog range features a shut-off button to reduce energy consumption during periods of prolonged inactivity.

MODELS	IDG 400	IDG 600	IDG 800	IDG 1200	IDG 1600
POWER	400 VA/240 W	600 VA/360 W	800 VA/480 W	1200 VA/720 W	1600 VA/960 W
INPUT					
Nominal voltage	220-240 Vac				
Input voltage tolerance	230 Vac (+20/-25%)				
frequency	50/60 Hz with automatic selection				
Frequency	50/60 Hz with automatic selection				
OUTPUT					
Voltage during mains operation	230 Vac (+20/-25%)				
Voltage during battery operation	230 Vac (+/- 10%)				
Frequency during battery operation	50 or 60 Hz (+/- 1%)				
Waveform	Pseudo Sinusoidal				
BATTERIES					
Type	VRLA AGM maintenance-free lead based				
Recharge time	6-8 h				
OTHER FEATURES					
Net weight (kg)	3.2	3.4	6.6	6.9	
Gross weight (kg)	3.7	4.1	8.1	8.6	
Dimensions (WxDxH) (mm)	90 x 232 x 192			93 x 310 x 270	
Packaging dimensions (WxDxH) (mm)	138 x 300 x 278			170 x 400 x 370	
Protections	Excessive low battery - overvoltage - short circuit				
Communications	USB			USB + RS232	
Output sockets	4 IEC 320 C13			6 IEC 320 C13	
Standards	EN 62040-1-1 and Directive 2006/95/EC; EN 62040-3 EN 62040-2 and Directive 2004/108 EC				
Certificates	CE				
Operating temperature	0 °C / +40 °C				
Colour	Black				
Altitude and relative humidity	6000 m max altitude, <95% non-condensing				
Standard equipment	2 output power supply cables, 1 USB cable, user manual				

Features

- Reduced energy consumption and 99% efficiency
- Maximum reliability and protection of PCs thanks to PowerShield³ monitoring and shutdown software, which can be downloaded free at www.riello-ups.com
- Can be installed on PCs with Windows 8, 7, 2008, Vista, 2003, Xp, Linux, Mac OSX and Sun Solaris operating systems
- Small size: With its compact shape, iDialog can be placed anywhere on the desk or in the home.
- Silent: iDialog is also suitable for protecting your non-professional digital

equipment such as home cinema systems, satellite and digital terrestrial receivers and DVD players/recorders.


2-YEAR WARRANTY

AVAILABLE OPTIONS

SOFTWARE

PowerShield³

DETAILS

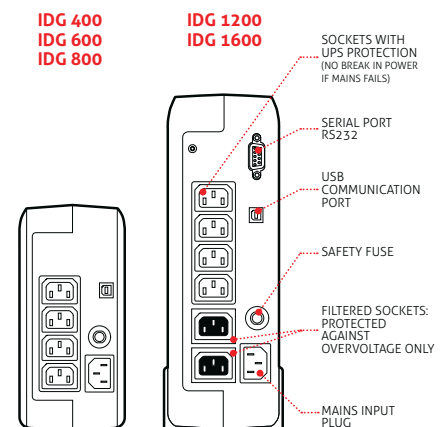

www.ups-riello.com



RPS SpA - Riello Power Solutions - Member of the Riello Elettronica Group
Viale Europa, 7 - 37045 Legnago (Verona) - ITALY | www.riello-ups.com
Tel: +39 0442 635811 - Fax: +39 0442 629098 | riello@riello-ups.com